


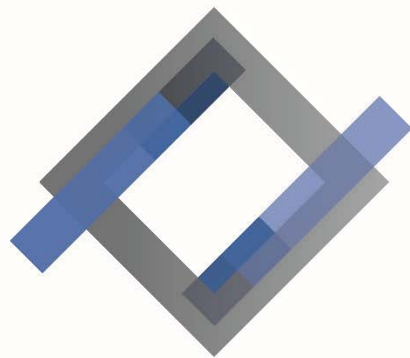

EIA

D I S T R I B U T I O N

1300 949 342

CATALOGUE

EIA Distribution is a wholly Western Australian owned company specialising in the supply of Electrical, Instrumentation and Automation products locally and nationally.

ph: 1300 949 342

fx: 08 6222 6678

sales@eiadist.com.au

Version 7b

16 Murray Rd Sth
Welshpool, WA 6106

www.eiadist.com.au



Contents

Pages 3 - 4	Mild Steel Terminal Boxes
Pages 5 - 7	Mild Steel Wall Mounted Enclosures
Page 8	Mild Steel Floor Standing Enclosures
Pages 9 - 10	Stainless Steel Terminal Boxes
Pages 11 - 12	Stainless Steel Wall Mounted Enclosures
Pages 13 - 14	Stainless Steel Floor Standing Enclosures
Page 15	Aluminium Junction Boxes
Pages 16 - 17	Plastic Clear & Grey Lid Terminal Enclosures
Page 18	Polyester Enclosures
Pages 19 - 20	PVC Slotted Ducting
Pages 21 - 22	Bootlace Ferrules
Page 23	Copper Cable Lugs
Pages 24 - 25	Cable Glands & Inserts
Page 26	Cable Ties
Pages 27 - 31	Nylon Conduit and Fittings
Pages 32 - 36	Network Cabinets & Accessories
Page 37	Heavy Duty Connectors
Page 38	Flexible Conduit Systems
Pages 39 - 41	Wire Tray & Accessories
Page 42	EXIN Portable LED Lights
Pages 43 - 44	Lockout/Tagout Equipment
Page 45	Rack-A-Tiers Wire Dispenser
Page 46	Control Cable

COMPACT ENCLOSURES

KT SERIE

KT TERMINAL BOXES



Material: Body, door 1.20mm mild steel + RAL 7035 coating
IP 66

Includes: 1 body, 1 door, 4 wall brackets and assembly parts

NB: The body structure is completely welded, water and dust resistant, and designed with a sealing foam gasket



Mounting Plate Application



Wall Bracket

Terminal Enclosure Steel



Steel terminal boxes with an RAL7035 powder coat finish.

Made of 1.2mm sheet steel and has an IP66 degree of Protection

Part Number	W x H x D	DESCRIPTION
MSTB15158	150w*150h*80d	TEMRINAL BOX closed type / IP66
MSTB151512	150w*150h*120d	TEMRINAL BOX closed type / IP66
MSTB201512	200w*150h*120d	TEMRINAL BOX closed type / IP66
MSTB20208	200w*200h*80d	TEMRINAL BOX closed type / IP66
MSTB202012	200w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB30158	300w*150h*80d	TEMRINAL BOX closed type / IP66
MSTB301512	300w*150h*120d	TEMRINAL BOX closed type / IP66
MSTB30208	300w*200h*80d	TEMRINAL BOX closed type / IP66
MSTB302012	300w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB303012	300w*300h*120d	TEMRINAL BOX closed type / IP66
MSTB401512	400w*150h*120d	TEMRINAL BOX closed type / IP66
MSTB40208	400w*200h*80d	TEMRINAL BOX closed type / IP66
MSTB402012	400w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB403012	400w*300h*120d	TEMRINAL BOX closed type / IP66
MSTB404012	400w*400h*120d	TEMRINAL BOX closed type / IP66
MSTB502012	500w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB503012	500w*300h*120d	TEMRINAL BOX closed type / IP66
MSTB602012	600w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB603012	600w*300h*120d	TEMRINAL BOX closed type / IP66
MSTB604012	600w*400h*120d	TEMRINAL BOX closed type / IP66
MSTB802012	800w*200h*120d	TEMRINAL BOX closed type / IP66
MSTB804012	800w*400h*120d	TEMRINAL BOX closed type / IP66

COMPACT ENCLOSURES

DM SERIE

DM WALL-MOUNTED ENCLOSURES



Material: Body, door 1.20mm mild steel + RAL 7035 coating

IP – Single Door 65, Double Door 55

Includes: 1 body, 1 door, 4 wall brackets, knitted earthing cable and assembly parts

NB: The body structure is completely welded, water and dust resistant, and designed with a sealing foam gasket



Gland Plate Structure



Wall Bracket

Included in the product as standard



Plastic Gland Plate



Inner Door Rail



Earthing Cable

Included in the product as standard



Steel Wall Mount Enclosure



Part Number	W x H x D	DESCRIPTION
MSE15158	150w*150h*80d	wall Mount Enclosure- IP66 (No M/P)
MSE151512	150w*150h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE15308	150w*300h*80d	wall Mount Enclosure- IP66 (No M/P)
MSE153012	150w*300h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE20208	200w*200h*80d	wall Mount Enclosure- IP66 (No M/P)
MSE202012	200w*200h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE20308	200w*300h*80d	wall Mount Enclosure- IP66 (No M/P)
MSE203012	200w*300h*120d	wall Mount Enclosure with M/P - IP65
MSE203015	200w*300h*150d	wall Mount Enclosure with M/P - IP65
MSE20408	200w*400h*80d	wall Mount Enclosure- IP66 (No M/P)
MSE204012	200w*400h*120d	wall Mount Enclosure - IP66 (No M/P)
MSE205012	200w*500h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE303012	300w*300h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE303020	300w*300h*200d	wall Mount Enclosure with M/P - IP65
MSE303021	300w*300h*210d	wall Mount Enclosure with M/P - IP65
MSE304012	300w*400h*120d	wall Mount Enclosure- IP66 (No M/P)
MSE304015	300w*400h*150d	wall Mount Enclosure with M/P - IP65
MSE3040155	300w*400h*155d	wall Mount Enclosure- IP66 (No M/P)
MSE304020	300w*400h*200d	wall Mount Enclosure with M/P - IP65
MSE304021	300w*400h*210d	wall Mount Enclosure with M/P - IP65
MSE3060155	300w*600h*155d	wall Mount Enclosure- IP66 (No M/P)
MSE3080155	300w*800h*155d	wall Mount Enclosure- IP66 (No M/P)
MSE383015	380w*300h*150d	wall Mount Enclosure with M/P - IP65
MSE383021	380w*300h*210d	wall Mount Enclosure with M/P - IP65
MSE383821	380w*380h*210d	wall Mount Enclosure with M/P - IP65
MSE386021	380w*600h*210d	wall Mount Enclosure with M/P - IP65
MSE386035	380w*600h*350d	wall Mount Enclosure with M/P - IP65



Steel Wall Mount Enclosure



Part No	W x H x D	Item Description
MSE403020	400w*300h*200d	wall Mount Enclosure with M/P - IP65
MSE404020	400w*400h*200d	wall Mount Enclosure with M/P - IP65
MSE405020	400w*500h*200d	wall Mount Enclosure with M/P - IP65
MSE405021	400w*500h*210d	wall Mount Enclosure with M/P - IP65
MSE406020	400w*600h*200d	wall Mount Enclosure with M/P - IP65
MSE406028	400w*600h*280d	wall Mount Enclosure with M/P - IP65
MSE505020	500w*500h*200d	wall Mount Enclosure with M/P - IP65
MSE505021	500w*500h*210d	wall Mount Enclosure with M/P - IP65
MSE505028	500w*500h*280d	wall Mount Enclosure with M/P - IP65
MSE505030	500w*500h*300d	wall Mount Enclosure with M/P - IP65
MSE506020	500w*600h*200d	wall Mount Enclosure with M/P - IP65
MSE506021	500w*600h*210d	wall Mount Enclosure with M/P - IP65
MSE507020	500w*700h*200d	wall Mount Enclosure with M/P - IP65
MSE507021	500w*700h*210d	wall Mount Enclosure with M/P - IP65
MSE507028	500w*700h*280d	wall Mount Enclosure with M/P - IP65
MSE603821	600w*380h*210d	wall Mount Enclosure with M/P - IP65
MSE603835	600w*380h*350d	wall Mount Enclosure with M/P - IP65
MSE604020	600w*400h*200d	wall Mount Enclosure with M/P - IP65
MSE604028	600w*400h*280d	wall Mount Enclosure with M/P - IP65
MSE606020	600w*600h*200d	wall Mount Enclosure with M/P - IP65
MSE606021	600w*600h*210d	wall Mount Enclosure with M/P - IP65
MSE606035	600w*600h*350d	wall Mount Enclosure with M/P - IP65
MSE607621	600w*760h*210d	wall Mount Enclosure with M/P - IP65
MSE607635	600w*760h*350d	wall Mount Enclosure with M/P - IP65
MSE608025	600w*800h*250d	wall Mount Enclosure with M/P - IP65
MSE608028	600w*800h*280d	wall Mount Enclosure with M/P - IP65
MSE6010025	600w*1000h*25d	wall Mount Enclosure with M/P - IP65
MSE6010028	600w*1000h*28d	wall Mount Enclosure with M/P - IP65
MSE60115028	600w*1150h*28d	wall Mount Enclosure with M/P - IP65
MSE6012030	600w*1200h*30d	wall Mount Enclosure with M/P - IP65
MSE767621	760w*760h*210d	wall Mount Enclosure with M/P - IP65
MSE8010028	800w*1000h*28d	wall Mount Enclosure with M/P - IP65
MSE8010030	800w*1000h*30d	wall Mount Enclosure with M/P - IP65
MSE8011528	800w*1150h*28d	wall Mount Enclosure with M/P - IP65
MSE1008028	1000w*800h*28d	wall Mount Enclosure with M/P - IP65
MSE10011528	1000w*1150h*2d	wall Mount Enclosure with M/P - IP65

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au



Floor Standing Enclosure Steel

IP55 degree of Protection

Part number	W x H x D	Description
MSFE6018050	600w*1800h*500d	Floor Standing Enclosure Mild Steel With Sides
MSFE6020040	600w*2000h*400d	Floor Standing Enclosure Mild Steel With Sides
MSFE6020060	600w*2000h*600d	Floor Standing Enclosure Mild Steel With Sides
MSFE12020050	1200w*2000h*500d	Floor Standing Enclosure Mild Steel With Sides



STAINLESS STEEL ENCLOSURES


KT STAINLESS STEEL TERMINAL BOXES



Material: Body, door 1.50mm 316 stainless steel

IP 66

Includes: 1 body, 1 door, 4 wall brackets and assembly parts



MOUNTING PLATE APPLICATION



WALL BRACKET





Terminal Enclosure 316 Stainless



Made of 316 grade Stainless Steel this range is suitable for marine, industrial, mining, food processing and other applications where corrosion is a concern.
 Made of 1.5mm sheet steel. Mounting panels are made of 2mm Zinc coated steel. Internal mounting panel sold separately.
 IP66 degree of protection.

Part Number	W x H x D	DESCRIPTION
SSTB15158	150w*150h*80d	Terminal Box 316 Stainless
SSTB151512	150w*150h*120d	Terminal Box 316 Stainless
SSTB201512	200w*150h*120d	Terminal Box 316 Stainless
SSTB20208	200w*200h*80d	Terminal Box 316 Stainless
SSTB202012	200w*200h*120d	Terminal Box 316 Stainless
SSTB30158	300w*150h*80d	Terminal Box 316 Stainless
SSTB301512	300w*150h*120d	Terminal Box 316 Stainless
SSTB30208	300w*200h*80d	Terminal Box 316 Stainless
SSTB302012	300w*200h*120d	Terminal Box 316 Stainless
SSTB303012	300w*300h*120d	Terminal Box 316 Stainless
SSTB304015	300w*400h*150d	Terminal Box 316 Stainless
SSTB401512	400w*150h*120d	Terminal Box 316 Stainless
SSTB40208	400w*200h*80d	Terminal Box 316 Stainless
SSTB402012	400w*200h*120d	Terminal Box 316 Stainless
SSTB403012	400w*300h*120d	Terminal Box 316 Stainless
SSTB404012	400w*400h*120d	Terminal Box 316 Stainless
SSTB502012	500w*200h*120d	Terminal Box 316 Stainless
SSTB503012	500w*300h*120d	Terminal Box 316 Stainless
SSTB602012	600w*200h*120d	Terminal Box 316 Stainless
SSTB603012	600w*300h*120d	Terminal Box 316 Stainless
SSTB802012	800w*200h*120d	Terminal Box 316 Stainless
SSTB804012	800w*400h*120d	Terminal Box 316 Stainless

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au

STAINLESS STEEL ENCLOSURES


DM STAINLESS STEEL WALL-MOUNTED ENCLOSURES




Material: Body, door 1.50mm 316 stainless steel
IP 66

Includes: 1 body, 1 door, 4 wall brackets, knitted earthing cable and assembly parts


Surface Process: Brush Stainless pattern




Mounting plate



Version 1



Version 2



Version 3

316 stainless Wall Mount Enclosure



Made of 316 grade Stainless Steel this range is suitable for marine, industrial, mining, food processing and other applications where corrosion is a concern.

Up to SSE6820 is made of 1.2mm stainless sheet steel.

Larger sizes are made of 1.5mm stainless sheet steel.

Mounting panels are made of 2mm Zinc coated steel.

IP66 degree of protection.

Part Number	W x H x D	DESCRIPTION
SSE202515	200w*250h*150d	wall Mount Enclosure with M/P - 316
SSE253015	250w*300h*150d	wall Mount Enclosure with M/P - 316
SSE303015	300w*300h*150d	wall Mount Enclosure with M/P - 316
SSE304015	300w*400h*150d	wall Mount Enclosure with M/P - 316
SSE304020	300w*400h*200d	wall Mount Enclosure with M/P - 316
SSE383821	380w*380h*210d	wall Mount Enclosure with M/P - 316
SSE404020	400w*400h*200d	wall Mount Enclosure with M/P - 316
SSE405020	400w*500h*200d	wall Mount Enclosure with M/P - 316
SSE405025	400w*500h*200d	wall Mount Enclosure with M/P - 316
SSE406020	400w*600h*200d	wall Mount Enclosure with M/P - 316
SSE406028	400w*600h*280d	wall Mount Enclosure with M/P - 316
SSE406030	400w*600h*300d	wall Mount Enclosure with M/P - 316
SSE505025	500w*500h*250d	wall Mount Enclosure with M/P - 316
SSE507020	500w*700h*200d	wall Mount Enclosure with M/P - 316
SSE507028	500w*700h*280d	wall Mount Enclosure with M/P - 316
SSE604020	600w*400h*200d	wall Mount Enclosure with M/P - 316
SSE606025	600w*600h*250d	wall Mount Enclosure with M/P - 316
SSE608020	600w*800h*200d	wall Mount Enclosure with M/P - 316
SSE608025	600w*800h*250d	wall Mount Enclosure with M/P - 316
SSE608028	600w*800h*280d	wall Mount Enclosure with M/P - 316
SSE608030	600w*800h*300d	wall Mount Enclosure with M/P - 316
SSE6010025	600w*1000h*250d	wall Mount Enclosure with M/P - 316
SSE6011528	600w*1150h*280d	wall Mount Enclosure with M/P - 316
SSE808025	800w*800h*250d	wall Mount Enclosure with M/P - 316
SSE8010025	800w*1000h*250d	wall Mount Enclosure with M/P - 316
SSE8010030	800w*1000h*300d	wall Mount Enclosure with M/P - 316
SSE8011528	800w*1150h*280d	wall Mount Enclosure with M/P - 316
SSE8012030	800w*1200h*300d	wall Mount Enclosure with M/P - 316
SSE10010028	1000w*1000h*280d	wall Mount Enclosure with M/P - 316

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678

Email : sales@eiadist.com.au

Web: www.eiadist.com.au

STAINLESS STEEL ENCLOSURES

DT FLOOR STANDING
STAINLESS STEEL ENCLOSURES



Material: Body, rear panel, top cover and plinth panels – 1.5mm 316 Stainless Steel sheet
Door and plinth corners – 2.0mm 316 Stainless Steel sheet.

Surface process: Natural stainless surface process

IP 55

Supply includes: 1 set of panel body, 1 pcs door, 1 pcs rear panel, 1 pcs top cover, 1 set of gland plate, 1 set of H100mm plinth, 1 set of enclosure combination kit, 4 pcs lifting hook, 1 mounting plate



Floor Standing Enclosure Stainless Steel

IP55 degree of Protection

Part number	Description
SSFE6018050	600W*1800H*500d SS316 FLOORSTANDING CABINET with M/P - IP55
SSFE8018040	800*1800*400 mm SS316 FLOORSTANDING CABINET with M/P - IP55
SSFE6020050	600*2000*500 mm SS316 FLOORSTANDING CABINET with M/P - IP55
SSFE60200600	600*2000*600 mm SS316 FLOORSTANDING CABINET with M/P - IP55

Stainless Steel Floor Enclosure Side Panels

SSFES18040	1800x400 mm SIDE PANELS -SS316 Pair
SSFES18050	1800x500 mm SIDE PANELS -SS316 Pair
SSFES20050	2000x500 mm SIDE PANELS -SS316 Pair
SSFES20060	2000x600 mm SIDE PANELS -SS316 Pair



16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au



ALUMINIUM JUNCTION BOX

Part Number	W x H x D	DESCRIPTION	QTY
AL504530	50w*45h*30d	Aluminium Junction Box	1
AL586436	58w*64h*36d	Aluminium Junction Box	1
AL986434	98w*64h*34d	Aluminium Junction Box	1
AL156436	150w*64h*36d	Aluminium Junction Box	1
AL807557	80w*75h*57d	Aluminium Junction Box	1
AL128057	125w*80h*57d	Aluminium Junction Box	1
AL178057	175w*80h*57d	Aluminium Junction Box	1
AL1501080	150w*100h*80d	Aluminium Junction Box	1
AL1758080	175w*80h*80d	Aluminium Junction Box	1
AL101080	100w*100h*80d	Aluminium Junction Box	1
AL1221280	122w*120h*80d	Aluminium Junction Box	1
AL221290	220w*120h* 90d	Aluminium Junction Box	1
AL161690	160w*160h*90d	Aluminium Junction Box	1
AL261690	260w*160h*90d	Aluminium Junction Box	1
AL241610	240w*160h*100d	Aluminium Junction Box	1
AL258080	250w*80h*80d	Aluminium Junction Box	1
AL282310	280w*230h*110d	Aluminium Junction Box	1
AL361090	360w*160h*90d	Aluminium Junction Box	1
AL332312	320w*230h*120d	Aluminium Junction Box	1
AL332318	330w*230h*180d	Aluminium Junction Box	1
AL258057	250w*80h*57d	Aluminium Junction Box	1
AL202310	200w*230h*110d	Aluminium Junction Box	1

Aluminium Junction Box (With Push Button Hole)

ALPB807557	80w*75h*57d Aluminium Junction Box with 1 Hole	1
------------	--	---



16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au



Terminal Enclosure Plastic Clear Lid IP66 /67

PC506555	50w*65h*55d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS659555	65w*95h*55d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS751275	75w*125h*75d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS751210	75w*125h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801170	80w*110h*70d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801185	80w*110h*85d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801160	80w*110h*60d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801145	80w*110h*45d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801370	80w*130h*70d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801385	80w*130h*85d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801690	80w*160h*90d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801655	80w*160h*55d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801870	80w*180h*70d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS801885	80w*180h*85d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS802570	80w*250h*70d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS802585	80w*250h*85d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS121210	125w*125h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS121275	125w*125h*75d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS121775	125w*175h*75d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS121710	125w*175h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS141795	140w*170h*95d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS142390	140w*230h*90d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS152010	150w*200h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS152013	150w*200h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS152510	150w*250h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS152513	150w*250h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS171775	175w*175h*75d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS171710	175w*175h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS172575	175w*250h*75d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS172510	175w*250h*100d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS202013	200w*200h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS202095	200w*200h*95d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS281913	280w*190h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS281918	280w*190h*180d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS282813	280w*280h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS282818	280w*280h*180d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS342813	340w*280h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS342818	340w*280h*180d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS283813	280w*380h*130d	Terminal Enclosure Plastic Clear Lid IP66/67
PCS283818	280w*380h*180d	Terminal Enclosure Plastic Clear Lid IP66/67



Terminal Enclosure Plastic Grey Lid IP66 /67

PGS506555	50w*65h*55d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS699555	65w*95h*55d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS751275	75w*125h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS751510	75w*125h*100d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS808060	80w*80h*60d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801170	80w*110h*70d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801185	80w*110h*85d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS081160	80w*110h*60d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801145	80w*110h*45d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801370	80w*130h*70d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801385	80w*130h*85d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801690	80w*160h*90d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801655	80w*160h*55d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801870	80w*180h*70d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS801858	80w*180h*85d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS802570	80w*250h*70d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS802585	80w*250h*85d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS101075	100w*100h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS121210	125w*125h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS121275	125w*125h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS121775	125w*175h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS121710	125w*175h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS141795	140w*170h*95d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS142390	140w*230h*90d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS152010	150w*200h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS152013	150w*200h*13d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS152510	150w*250h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS152513	150w*250h*13d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS181875	180w*180h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS171710	175w*175h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS172575	175w*250h*75d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS172510	175w*250h*10d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS202013	200w*200h*13d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS202095	200w*200h*95d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS281913	280w*190h*130d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS281918	280w*190h*180d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS282813	280w*280h*130d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS282818	280w*280h*180d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS342813	340w*280h*130d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS342818	340w*280h*180d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS283813	280w*380h*130d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS283818	280w*380h*180d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS285613	280w*560h*130d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS334318	330w*430h*180d	Terminal Enclosure Plastic Grey Lid IP66/67
PGS385618	380w*560h*180d	Terminal Enclosure Plastic Grey Lid IP66/67

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
Email : sales@eiadist.com.au Web: www.eiadist.com.au

Polyester Enclosure



Polyester Enclosure

Fibre Glass reinforced polyester enclosures provides a high degree of mechanical protection. They weigh 1/3 of an equivalent metal enclosure and are perfect for use in highly corrosive environments.

With a IP66 degree of protection they are suitable for use in harsh environments.

Included Internal mounting panel

Part Number	W x H x D	DESCRIPTION
TIP253014	250w*300h*140d	Wall Mount Enclosure. Polyester
TIP304020	300w*400h*200d	Wall Mount Enclosure. Polyester
TIP404020	400w*400h*200d	Wall Mount Enclosure. Polyester
TIP405020	400w*500h*200d	Wall Mount Enclosure. Polyester
TIP406023	400w*600h*230d	Wall Mount Enclosure. Polyester
TIP605023	500w*600h*230d	Wall Mount Enclosure. Polyester
TIP608030	600w*800h*300d	Wall Mount Enclosure. Polyester

PVC Slotted Ducting

Practical (dis) assembly of the duct covers

(Dis) Assembly of the covers is the most difficult operation when the duct is fully wired. Design of Trunkie speeds up your work and makes (dis) assembly of the cover easier.



Durable and Reliable

Trunkie enables the end-user to use the maximum inner space of the duct and keeps its rigidity even at this maximum load of cables.



Speed and Efficiency

Without using any hand tools you can bend the duct ribs up to 90 degrees angle and easily break them off inside of the panel. Furthermore Trunkie helps you to save time while you break off a group of ribs.



The Solutions, which Ease Wiring

Now wire management is much easier. You can easily mount wire retainers on the bottom rail of the duct, and slide them on the bottom rail.



Appearance

Special rib pattern allows the end-user to make cable grouping even on the entry level.





PRODUCT CHARACTERISTICS


- Operating temperature range -15°C... 60°C
- Standard length 2 meters
- Standard colour RAL 7030 grey
- In compliance with RoHS directive
- In compliance with IEC 60695-2-1 and EN 50085-2-3 standards
- Certificates: VDE, UL, CE and GOST
- Wide product range

Part No.	Dimension (W*H)	Description
SD2530	25MM X 30MM	Slotted wiring duct 25mm x 30mm
SD2540	25MM X 40MM	Slotted wiring duct 25mm x 40mm
SD2560	25MM X 60MM	Slotted wiring duct 25mm x 60mm
SD4040	40MM X 40MM	Slotted wiring duct 40mm x 40mm
SD4060	40MM X 60MM	Slotted wiring duct 40mm x 60mm
SD4080	40MM X 80MM	Slotted wiring duct 40mm x 80mm
SD6040	60MM X 40MM	Slotted wiring duct 60mm x 40mm
SD6060	60MM X 60MM	Slotted wiring duct 60mm x 60mm
SD6080	60MM X 80MM	Slotted wiring duct 60mm x 80mm
SD8080	80MM X 80MM	Slotted wiring duct 80mm x 80mm
SD10060	100MM X 60MM	Slotted wiring duct 100mm x 60mm
SD10080	100MM X 80MM	Slotted wiring duct 100mm x 80mm
SD12060	120MM X 60MM	Slotted wiring duct 120mm x 60mm
SD12080	120MM X 80MM	Slotted wiring duct 120mm x 80mm

Pre Insulated End Sleeve (Boot Lace) Ferrules




Designed to be crimped onto the end of flexible wires and cables before insertion into rail mounted or screw terminals, to provide protection to the fragile wire strands against bending back and breakage. Featuring a funnel entry, the fine electrolytic copper tubes are tin plated for superior conductivity and corrosion resistance. Pre-insulated ferrules are colour coded by size for easy product selection.

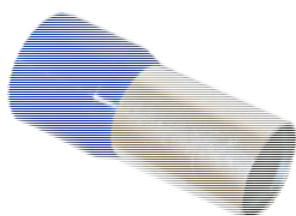

Part No.	Description	Qty
BL00352	Boot Lace Ferrules Pink .25/.34mm * 6mm	500Pk
BL00382	Boot Lace Ferrules Pink .25/.34mm * 8mm	500Pk
BL00552	Boot Lace Ferrules White .5mm * 8mm	500Pk
BL00752	Boot Lace Ferrules Blue .75mm * 8mm	500Pk
BL01052	Boot Lace Ferrules Red 1.0mm * 8mm	500Pk
BL01552	Boot Lace Ferrules Black 1.5mm * 8mm	500Pk
BL01582	Boot Lace Ferrules Black 1.5mm * 10mm	500Pk
BL02552	Boot Lace Ferrule Grey 2.5mm * 8mm	500Pk
BL02572	Boot Lace Ferrule Grey 2.5mm * 12mm	500Pk
BL02582	Boot Lace Ferrule Grey 2.5mm * 18mm	500Pk
BL04052	Boot Lace Ferrule orange 4mm * 10mm	100Pk
BL04072	Boot Lace Ferrule orange 4mm * 12mm	200Pk
BL04082	Boot Lace Ferrule orange 4mm * 18mm	100Pk
BL06052	Boot Lace Ferrule green 6mm * 12mm	100Pk
BL06082	Boot Lace Ferrule green 6mm * 18mm	100Pk
BL10052	Boot Lace Ferrule brown 10mm * 12mm	100Pk
BL10082	Boot Lace Ferrule brown 10mm * 18mm	100Pk
BL16052	Boot Lace Ferrules White 16mm * 12mm	100Pk
BL16082	Boot Lace Ferrules White 16mm * 18mm	100Pk
BL25082	Boot Lace Ferrules Black 25mm * 16mm	50Pk
BL25092	Boot Lace Ferrules Black 25mm * 22mm	50Pk
BL35082	Boot Lace Ferrules Red 35mm * 16mm	20Pk
BL35092	Boot Lace Ferrules Red 35mm * 25mm	20Pk
BL50082	Boot Lace Ferrules Blue 50mm * 20mm	10Pk
BL70082	Boot Lace Ferrules Yellow 70mm * 20mm	10Pk
BL95082	Boot Lace Ferrules Red 95mm * 25mm	10Pk

Pre-Insulated Twin End Sleeve (Boot Lace) Ferrules




The twin wire range is specifically designed to terminate two wires in the same terminal

A quick and easy way to terminate two wires

Developed for use in smaller switches and devices

Part No.	Description	Qty
BLT0752	Twin Boot Lace Ferrules Grey .75mm* 8mm	500Pk
BLT1052	Twin Boot Lace Ferrules RED 1.0 mm* 8mm	500Pk
BLT1552	Twin Boot Lace Ferrules Black 1.5mm* 8mm	500Pk
BLT2555	Twin Boot Lace Ferrules blue 2.5mm* 10mm	500Pk




copper cable lugs



Copper cable lugs and links are manufactured from 99.9% oxygen free, high conductivity copper, electro-tin plated for superior corrosion resistance, and feature an extended operating temperature range of -55 to 155°C. Lug sizes 10 to 95mm² are supplied bell mouth as standard. Other sizes are available but not stocked.



Part No	Description	Qty
L10-6	Copper Lug 10mm_ Cable Stud Size 6mm	1
L10-8	Copper Lug 10mm_ Cable Stud Size 8mm	1
L10-10	Copper Lug 10mm_ Cable Stud Size 10mm	1
L10-12	Copper Lug 10mm_ Cable Stud Size 12mm	1
L16-8	Copper Lug 16mm_ Cable Stud Size 8mm	1
L16-10	Copper Lug 16mm_ Cable Stud Size 10mm	1
L16-12	Copper Lug 16mm_ Cable Stud Size 12mm	1
L25-8	Copper Lug 25mm_ Cable Stud Size 8mm	1
L25-10	Copper Lug 25mm_ Cable Stud Size 10mm	1
L25-12	Copper Lug 25mm_ Cable Stud Size 12mm	1
L35-8	Copper Lug 35mm_ Cable Stud Size 8mm	1
L35-10	Copper Lug 35mm_ Cable Stud Size 10mm	1
L35-12	Copper Lug 35mm_ Cable Stud Size 12mm	1
L50-8	Copper Lug 50mm_ Cable Stud Size 8mm	1
L50-10	Copper Lug 50mm_ Cable Stud Size 10mm	1
L50-12	Copper Lug 50mm_ Cable Stud Size 12mm	1
L70-8	Copper Lug 70mm_ Cable Stud Size 8mm	1
L70-10	Copper Lug 70mm_ Cable Stud Size 10mm	1
L70-12	Copper Lug 70mm_ Cable Stud Size 12mm	1
L95-8	Copper Lug 95mm_ Cable Stud Size 8mm	1
L95-10	Copper Lug 95mm_ Cable Stud Size 10mm	1
L95-12	Copper Lug 95mm_ Cable Stud Size 12mm	1
L120-8	Copper Lug 120mm_ Cable Stud Size 8mm	1
L120-10	Copper Lug 120mm_ Cable Stud Size 10mm	1
L120-12	Copper Lug 120mm_ Cable Stud Size 12mm	1
L150-8	Copper Lug 150mm_ Cable Stud Size 8mm	1
L150-10	Copper Lug 150mm_ Cable Stud Size 10mm	1
L150-12	Copper Lug 150mm_ Cable Stud Size 12mm	1

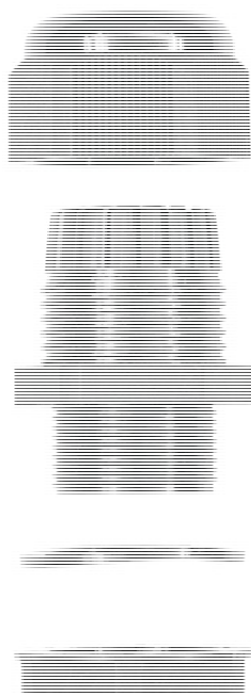

Nylon Cable Glands

Features

- » IP68 degree of protection
- » UL approved nylon 66, 94V-2 (Black)
- » UV resistant in outdoor applications
- » Indoor and outdoor applications
- » Superior strain relief
- » Operating temperature range of -40oC to 100oC
- » Provides a positive seal on cable sheath

Part No.	Description
NG12	Nylon Gland 4-6mm Dia.
NG16	Nylon Gland 5-10mm Dia.
NG20	Nylon Gland 10-14mm Dia.
NG25	Nylon Gland 13-18mm Dia.
NG32	Nylon Gland 18-25mm Dia.
NG40	Nylon Gland 22-32mm Dia.
NG50	Nylon Gland 30-38mm Dia.
NG63	Nylon Gland 34-44mm Dia.



Metal Ip68 Rated Cable Glands

Part No.	Description
MG12	Metal Gland 3-6mm Dia.
MG16	Metal Gland 5-10mm Dia.
MG20	Metal Gland 10-13mm Dia.
MG25	Metal Gland 11-17mm Dia.
MG32	Metal Gland 15-21mm Dia.
MG40	Metal Gland 19.28mm Dia.
MG50	Metal Gland 26.35mm Dia.
MG63	Metal Gland 32-42mm Dia.



Multiple sealing insert for metric cable glands

Application:

Turns the cable gland into a multiple gland. A sealing ring with several holes is used in place of the inner sealing insert. The multiple sealing insert enables several cables to be fed simultaneously through one gland. As a result, components can be dimensioned smaller because there is no need to use one separate gland per cable.

Material:


NBR

Temperature Range:

-40oC to +100oC

Protection Class:

IP 68 (with all bores filled)

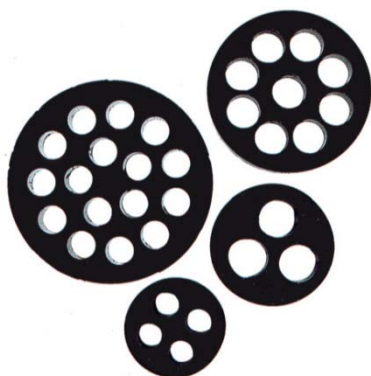

Suits Gland

Part No.	Suits Gland	No. of cables x cable Ø mm
53316223	M16	2 x 3
53332650	M32	6 x 5
53332560	M32	5 x 6
53340490	M40	4 x 9



Part No. 53700006

NYLON PLUG 6MM X 14MM LONG

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678

Email : sales@eiadist.com.au

Web: www.eiadist.com.au



Cable ties

high performance cable fastening systems, featuring the sturdy locking barb and a large assortment of mounting bases. Ty-Rap is available in a variety of materials and is designed to increase productivity and lower the installed cost of harness fabrication and wire bundling



Nylon Cable Ties

Part No.	Description	U/M
CT-533250B	3.6X250 CABLE TIE BLACK PK100	pk100
CT-533292B	3.6X292 CABLE TIE BLACK PK100	pk100
CT-534368B	4.8X368 CABLE TIES BLACK PK100	pk100
CT-530750B	5.0X307 CABLE TIE BLACK PK100	pk100



CLEAR ADHESIVE PADS

Part No.	Description	U/M
CTAMB19	19X19MM CLEAR ADHESIVE PADS	PK100
CTAMB25	25X25MM CLEAR ADHESIVE PADS	PK100



CABLE TIE TAGS

Part No.	Description	U/M
IP38-19	CABLE TIE TAGS WHITE PK100	pk100

Nylon Flexible Conduit



Material: Polyamide (Nylon) 6

IP Ratings: IP40, IP67

Product Details: Flexible,
standard weight conduit for
automotive applications and
harness fabrication.

Part No.	Description	Qty
NC08	Nylon Conduit [ID 6.6mm]	100M roll
NC10	Nylon Conduit [ID 8.4mm]	100M roll
NC12	Nylon Conduit [ID 9.9mm]	100M roll
NC16	Nylon Conduit [ID 12.8mm]	50M roll
NC20	Nylon Conduit [ID 16.6mm]	50M roll
NC25	Nylon Conduit [ID 21.2mm]	50M roll
NC32	Nylon Conduit [ID 29.0mm]	50M roll
NC40	Nylon Conduit [ID 35.1mm]	25M roll
NC50	Nylon Conduit [ID 46.6mm]	25M roll
NC28	Nylon Conduit [ID 28.0mm]	50M roll

Nylon Flexible Conduit Fittings

Complete Straight Adaptor Body



Part No.	Description	Qty
AB10M16	Kit Adaptor Body Nylon 10/M16	1
AB12M16	Kit Adaptor Body Nylon 12/M16	1
AB12M20	Kit Adaptor Body Nylon 12/M20	1
AB12PG09	Kit Adaptor Body Nylon 12/Pg09	1
AB12PG11	Kit Adaptor Body Nylon 12/Pg11	1
AB16M16	Kit Adaptor Body Nylon 16/M16	1
AB16M20	Kit Adaptor Body Nylon 16/M20	1
AB20M20	Kit Adaptor Body Nylon 20/M20	1
AB25M25	Kit Adaptor Body Nylon 25/M25	1
AB32M32	Kit Adaptor Body Nylon 32/M32	1

Complete 90 Degree Adaptor Body



Part No.	Description	QTY
AB10M1690	90 Degree A/Body 10/M16mm	1
AB12M1690	90 Degree A/Body 12/M16mm	1
AB16M1690	90 Degree A/Body 16/M16mm	1
AB16M2090	90 Degree A/Body 16/M20mm	1
AB20M2090	90 Degree A/Body 20/M20mm	1
AB25M2590	90 Degree A/Body 25/M25mm	1
AB32M3290	90 Degree A/Body 32/M32mm	1



Nylon Flexible Conduit Fittings



Complete X-Piece

Part No.	Description	Qty
CXP20	X-Piece Complete Nylon Conduit 20X4	1

Complete T-Piece



Part No.	Description	Qty
ACTP10	T-Piece Complete Nylon 10 X3	1
ACTP12	T-Piece Complete Nylon 12X3	1
ACTP16	T-Piece Complete Nylon 16X3	1
ACTP20	T-Piece Complete Nylon 20 X3	1
ACTP28	T-Piece Complete Nylon 25 X3	1
ACTP32	T-Piece Complete Nylon 32 X3	1

Complete Manifold



Part No.	Description	QTY
CMF25X12	Manifold Nylon Conduit 25X2 & 12X2	1



Nylon Flexible Conduit Fittings

End Sleeves



Part No.	Description	Qty
ESN12	Suit Conduit 12	1
ESN16	Suit Conduit 16	1
ESN20	Suit Conduit 20	1
ESN25	Suit Conduit 25	1
ESN32	Suit Conduit 32	1

Heavy Duty Nylon Fixing Clip



Part No.	Description	Qty
RP12	Suit Conduit 10	1
RP13	Suit Conduit 12	1
RP16	Suit Conduit 16	1
RP22	Suit Conduit 22	1
RP25	Suit Conduit 25	1

End Caps



Part No.	Description	Qty
EK0308	Suit Conduit 10 & 12	1
EK05	Suit Conduit 12	1



Nylon Flexible Conduit Fittings

Reducing Kit



Part No.	Description	Qty
ARK12-08	Reducing Kit Nylon Conduit 12-Nylon Conduit 08	1
ARK16-08	Reducing Kit Nylon Conduit 16-Nylon Conduit 08	1
ARK16-12	Reducing Kit Nylon Conduit 16-Nylon Conduit 12	1
ARK20-08	Reducing Kit Nylon Conduit 20-Nylon Conduit 08	1
ARK20-12	Reducing Kit Nylon Conduit 20-Nylon Conduit 12	1
ARK20-16	Reducing Kit Nylon Conduit 20-Nylon Conduit 16	1
ARK28-12	Reducing Kit Nylon Conduit 25-Nylon Conduit 12	1
ARK28-16	Reducing Kit Nylon Conduit 25-Nylon Conduit 16	1
ARK28-20	Reducing Kit Nylon Conduit 25-Nylon Conduit 20	1
ARK32-20	Reducing Kit Nylon Conduit 32-Nylon Conduit 20	1
ARK32-28	Reducing Kit Nylon Conduit 32-Nylon Conduit 28	1



4RU 450mm Wall Mount Cabinet
 6RU 450mm Wall Mount Cabinet
 9RU 450mm Wall Mount Cabinet
 12RU 450mm Wall Mount Cabinet
 15RU 450mm Wall Mount Cabinet



6RU 19" 600mm Wide x 600mm Wall Mount Cabinet
 9RU 19" 600mm Wide x 600mm Wall Mount Cabinet
 12RU 19" 600mm Wide x 600mm Wall Mount Cabinet
 15RU 19" 600mm Wide x 600mm Wall Mount Cabinet
 18RU 19" 600mm Wide x 600mm Wall Mount Cabinet
 22RU 19" 600mm Wide x 600mm Wall Mount Cabinet



18RU 19" 600mm Wide x 600mm Deep Server Rack
 22RU 19" 600mm Wide x 600mm Deep Server Rack
 27RU 19" 600mm Wide x 600mm Deep Server Rack
 32RU 19" 600mm Wide x 600mm Deep Server Rack
 37RU 19" 600mm Wide x 600mm Deep Server Rack
 42RU 19" 600mm Wide x 600mm Deep Server Rack

18RU 19" 600mm Wide x 800mm Deep Server Rack
 22RU 19" 600mm Wide x 800mm Deep Server Rack
 27RU 19" 600mm Wide x 800mm Deep Server Rack
 32RU 19" 600mm Wide x 800mm Deep Server Rack
 37RU 19" 600mm Wide x 800mm Deep Server Rack
 42RU 19" 600mm Wide x 800mm Deep Server Rack

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au

Rack Mount Accessories

	Part number	Description	QTY
	LET2	2 Way Rack Mount Fan Kit	1
	KEYLOCK	Cabinet Side Door Lock	1
	BP1U	1RU Blanking Panel	1
	BP2U	2RU Blanking Panel	1
	993.420	Cage Nuts (20 Pack)	1

Fan and Filter Units



Part number	Description	QTY
LEK 2	2 Fans, Single Row, 230V	1
LEK 3	3 Fans, Single Row, 230V	1
LET 4	4 Fans, 2 Rows, 230V	1
LET 6	6 Fans, 2 Rows, 230V	1
LV 250	Filter fan, 63 m3/h, 230V	1
LV 300	Filter fan, 115 m3/h, 230V	1
LV 400	Filter fan, 250 m3/h, 230V	1
LV 600	Filter fan, 580 m3/h, 230V	1
LV 700	Filter fan, 730 m3/h, 230V	1
fan with thermo	fan with thermo	1



Power plug 19inch rack



Part number	Description	QTY
PWR15v10a	vertical 15 way 10amp	1
PWR6H10	HORIZONTAL 6 way 10amp	1
PWR12H10	HORIZONTAL 12 way 10amp	1
PWR20V1610A	vertical 20way 10amp	1



Rack Cable Management

	Part number	Description	QTY
		1RU Metal Slotted Cable Management Rail	1
		1RU Cable Management Rail with 6 Adjustable Rings	1
		1RU 19" Brush Panel	1
		2RU Metal Cable Management Rail	1
		Vertical Rack Cable Management Rail	1
		1RU Double Sided Cable Management Rail	1

19" Rack Shelves

	Description	QTY
	1RU Universal Sliding Shelf	1
	2RU Cantilever Shelf 250mm Deep	1
	2RU Cantilever Shelf 350mm Deep	1
	2RU Cantilever Shelf 450mm Deep	1

Heavy duty Connectors

heavy duty connectors are mainly used in control panels, robotics, industrial automation and wherever connections are required for power, control and signal circuits in industrial or in particularly harsh environments for the presence of aggressive substances. Multipole Connectors are suitable for the use with alternate and direct current and to facilitate the manufacturing process, installation and maintenance of sectional electric parts in complex machinery




Part number	Description	QTY
7203.6001.0	Screw Type Insert Female 3P	1
7203.6101.0	SCREW Type Insert Male 3P	1
7210.4401.0	Screw Type Insert Female 10P	1
7210.4411.0	Screw Type Insert Male 10P	1
7216.4402.0	Screw Type Insert Female 16p	1
7216.4412.0	Screw Type Insert Male 16P	1
7803.6202.A	BH.Mount Housing 1 Lever S/S	1
7803.6228.0	Hood 4C + E 6PIN 1	
7803.6230.0	Hood Side Entry Std Male 20M	1
7803.6802.0	Protect Cover Female 3 &4 Pin	1
7803.6885.A	Protect Cover Male 1 Lever	1
7806.7205.0	Housings with Automatic Cover	1
7810.4541.0	BH Mount Housing 1 Lever 10 Pin	1
7810.4561.0	Hood Top Entry M20 10 Pin	1
7810.4581.0	Hood Side Entry M20 10 Pin	1
7810.6412.0	BH Mount 10 PIN 2 Levers	1
7810.6570.0	Hood Top Entry with 4 Pegs 10p	1
7810.6598.0	Hood Top Entry with2 Lever 10p	1
7810.7003.0	Hood Top Entry with2 Lever 10p	1
7810.7206.0	BH Mount Automatic Cover 10p	1
7816.4543.0	BH Mount Housing 1 Lever	1
7816.4566.0	Hood Top Entry with 2 Pegs	1
7816.6413.0	BH Mounting with2 lever 16p	1
7816.6457.0	Hood Top Entry with Levers 16p	1
7816.6572.0	Hood Top Entry with 4 Pegs 16p	1
7816.6587.0	Hood Top Entry with 2 Lever16p	1
7816.7207.0	BH Mount Automatic Cover 16p	1

Flexible Conduit Systems


Hi-Flex

Metallic and non-metallic flexible conduit systems.

The Hi-Flex range of flexible conduit and fittings includes products tested to comply with the rigorous requirements of AS/NZS 2053.1:2001 conduit and fittings for electrical installations – general requirements and AS/NZS 2053.8:1995 conduit and fittings for electrical installations – flexible conduit and fittings of metal or composite material



Description	QTY
HI FLEX FITTING M20 X1.5 45deg	1
HI FLEX FITTING M25 X1.5 45deg	1
HI FLEX FITTING M40 X1.5 45deg	1
HI FLEX FITTING M20 X1.5 90deg	1
HI FLEX FITTING M25 X1.5 90deg	1
HI FLEX FITTING M40 X1.5 90deg	1
HI FLEX FITTING M20 X 1.5 Straight	1
HI FLEX FITTING M25 X1.5 Straight	1
HI FLEX FITTING M32 X1.5 Straight	1
HI FLEX FITTING M40 X1.5 Straight	1

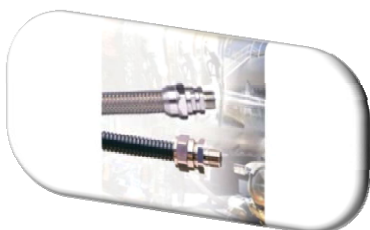


HI FLEX tubing

Description	Roll size
HI FLEX 20MM CONDUIT BLACK	10,25,50 roll
HI FLEX 25MM CONDUIT BLACK	10,25,50 roll
25MM IND GRADE FLEX GREY CONDU	10,25,50 roll
HI FLEX CONDUIT 32MM BLACK	10,25 roll
HI FLEX CONDUIT 40MM BLACK	10,25 roll

Wire Tray

Available in Zinc ,316Stainless steel ,Hot dip Galvanised

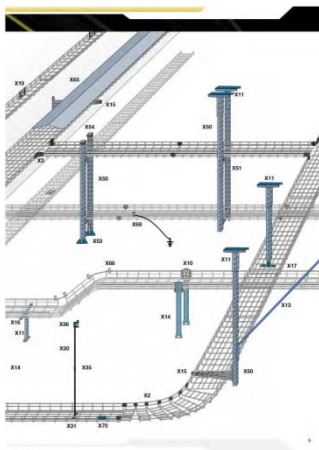

Part.no	Description	Qty
WT0101	X-Tray 60x60 Fzb	2.5mtr lengths
WT0111	X-Tray 120x60 Fzb	2.5mtr lengths
WT0112	X-Tray 120x110 Fzb	2.5mtr lengths
WT0121	X-Tray 220x60 Fzb	2.5mtr lengths
WT0122	X-Tray 220x110 Fzb	2.5mtr lengths
WT0131	X-Tray 320x60 Fzb	2.5mtr lengths
WT0132	X-Tray 320x110 Fzb	2.5mtr lengths
WT0141	X-Tray 420x60 Fzb	2.5mtr lengths
WT0142	X-Tray 420x110 Fzb	2.5mtr lengths
WT0152	X-Tray 520x110 Fzb	2.5mtr lengths
WT0162	X-Tray 620x110 Fzb	2.5mtr lengths
WT1121	X-Tray G100x60 Fzb	2.5mtr lengths
WT1122	X-Tray G150x120 Fzb	2.5mtr lengths





WIRE TRY Accessories

Part.no	Description	Qty
WT2101	X1 Fitting Zinc	each
WT2102	X2 Fitting Zinc	each
WT2103	X3 Angled Fitting Zinc	each
WT2104	X4 Fitting Zinc	each
WT2110	X10 Bracket Zinc	each
WT2111-240	X11 Pendant/H 240 Zinc	each
WT2111-480	X11 Pendant/H 480 Zinc	each
WT2112-240	X12 Flexible Pendant 240 Zinc	each
WT2112-480	X12 Flexible Pendant 480 Zinc	each
WT2113	X13 Side Support Zinc	each
WT2114-100	X14 Pendant/L 100 Zinc	each
WT2114-280	X14 Pendant/L 280 Zinc	each
WT2114-460	X14 Pendant/L 460 Zinc	each
WT2115-120	X15 Bracket 60-120 Zinc	each
WT2115-220	X15 Bracket 220 Zinc	each
WT2115-320	X15 Bracket 320 Zinc	each
WT2115-420	X15 Bracket 420 Zinc	each
WT2115-520	X15 Bracket 520 Zinc	each
WT2115-620	X15 Bracket 620 Zinc	each
WT2116	X16 Floor Support Zinc	each
WT2117	X17 Support Hook 120-320	each
WT2118	X18 Support Hook 420-620	each
WT2130	X30 Threaded Rod M8x1000	each
WT2135	X35 TR Distance Nut M8	10 pcs
WT2150-1000	X50 X-Bar 1000	length
WT2150-1920	X50 X-Bar 1920	length
WT2150-2120	X50 X-Bar 2120	length
WT2150-2480	X50 X-Bar 2480	length
WT2150-400	X50 X-Bar 400	length
WT2150-600	X50 X-Bar 600	length
WT2150-800	X50 X-Bar 800	length
WT2151	X51 X-Bar Joining Fitting	each
WT2152	X52 X-Bar Corner Fitting	each
WT2153	X53 X-Bar Adjustable Foot	each
WT2161	X61 Bolt M8x25	40 pcs
WT2162	X62 Flange Nut M8	40 pcs
WT2163-1	X63 Accessories Holder	each
WT2163-2	X63 Accessories without holes	each

OVERVIEW ACCESSORIES

Fittings



Mountings



Threaded Rod



X-Bar



Accessories



Tools



Accessories are design protected.
Subject to change without prior notice. 11



EXIN Light Heavy Duty Portable LED Light



The Exin Light when in its travel position is totally contained within its own heavy duty plastic body. When extended, the Exin Light has two different height settings, and a multitude of angle setting for the light head itself. This means this product is compact enough to move from site to site yet adaptable enough to be suitable anywhere. The light head is fitted with over 250 LED's and can be used in a variety of settings – side A only, side B only, or both sides to emit light in all directions. Not only does the Exin Light offer all of these features – but it weighs only 7.7kg (including accessories, battery and components).

The battery can power the light for 10-12hrs, and is easily rechargeable from any 240V GPO, or from a vehicles 12V cigarette lighter. Both charging cables are included, and are stored with the lights body for added convenience. The Exin Light also features a low-battery indicator light, so you know when it's time to recharge.

The Exin Light is available with various attachment clamps to use in various situations. ENERGEX in Queensland have adopted a pole mounting clamp – that allows the Exin light to be attached to power poles for line workers. The other mounting options available also include a tri-pod, as well as stabilising brackets. The Exin Light of course also be used stand alone for ground level or trench and pit work.



Item Code	Description	
Traveller	Traveller 720L	Single sided light
IN120L	120l Smith Light	Double side light
IN2400L	2400L Smith light	Single sided light
EX90LT4	EX90 Smith Light EX	Double side light

16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678
 Email : sales@eiadist.com.au Web: www.eiadist.com.au

Lockout /Tagout Equipment



Safety Lockout Padlock

Part Number	Description	Colour	Qty
SLP-450-RD	Safety Lockout Padlock - Keyed Differently	Red	1
SLP-450-BE	Locking out energy sources	Blue	1
SLP-450-YW	Plastic and Stainless Steel	Yellow	1
SLP-450-OE	38 x 19mm house - 5 x 50mm shackle	Orange	1
SLP-450-GN		Green	1
SLP-450-WE	One key per lock supplied standard.	White	1
SLP-450-BK	Can be supplied with Logo or Name Label.	Black	1
	Key Retaining Keyed Different (Keyed Alike available upon request)		

Please note: Key NOT electrically insulated from the shackle

Standard Scissor Hasp

Part Number	Description	Colour	Qty
SLH-52	Anti-twist opening protection inbuilt Lockout Hasps enable up to 6 workers to Lock Out the same point on machinery. Lockout situations where more than one person is involved. Hardened Plated Steel, Poly Coating 2mm thick, 25mmdiameter jaws 6 - suits padlocks up to 8mm shackle diameter	Silver/Red	1



Lockout /Tagout Stations

Part Number	Description	Qty
LST-3	Lockout Station - Medium	1



Large Lockout Station contains:

- 20 Lockout Padlocks
- 30 Do Not Operate Tags
- 15 Out of Service Tags
- 3 SLH-30 Lockout Hasps Stainless Steel red poly coating
- 3 UCL-1 Universal Lockout Device for Miniature Breakers
- 3 UCL-2 Universal Lockout Device for Moulded Case Circuit Breakers
- 3 UFL-2 Universal Lockout Device for Fuse Holder
- 1 UCL-2-EL Lockout Device for short toggle Circuit Breaker
- 1 MFL-2 Multifunction Cable Lockout Device
- 1 PLD-1 Plug and Air Hose Lockout Device

Dimensions: 300 x 500mm

Also available in other sizes


Group Lock Box - Aluminium

Part Number	Description	Qty
SGLB-4-RED	Sturdy Aluminium Construction Size 320mm x 405mm x 150mm Clear tough Polycarbonate front sliding cover	1





Rack-A-Tiers Wire Dispenser

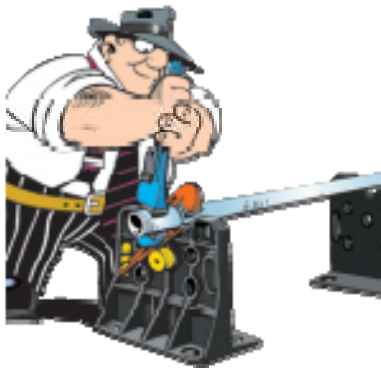

Part# EIA00029

The Rack-A-Tiers Wire Dispenser is the one tool that DOES IT ALL. It's no surprise that we've sold hundreds of thousands of them to electricians everywhere. This genius invention is most commonly used for dispensing wire from spools of various sizes, but just flip through the images to see its many other uses!

Features

- Interlocking Pairs
- Versatile
- Waterproof
- Rustproof
- Reliable
- Rugged
- Easy to set up

Mfg Note

This tool is versatile, waterproof, rustproof, rugged, and very reliable. It even locks together to make a comfortable seat!



16 Murray Rd Welshpool 6106 Phone 1300949342 Fax 6222 6678

Email : sales@eiadist.com.au

Web: www.eiadist.com.au

Multi core PVC Flexible Control Cables

APPLICATION

PROTOFLEX® PVC control cables are specially suitable for use as flexible control cables.

- Fans and air-conditioning systems
- Machine tools
- Production and processing machines
- Industrial robots

DESIGN

PROTOFLEX® PVC control cables consist of finely stranded copper conductors with V75 PVC insulation. The high grade PVC sheath is resistant to oil, grease and chemicals.

PROTOFLEX® PVC screened control cables have a PVC inner and outer sheath with a copper braided shield between the sheaths which serves to avoid electromagnetic interference (EMC) in building systems and where equipment is in environments where Electromagnetic interference would be unacceptable.

Designed for moderate mechanical loading, in dry, damp and wet areas and in hazardous areas. Outdoor use is possible, provided that the cables are protected from direct sunlight and are permanently installed.



CURRENT-CARRYING CAPACITY

The current-carrying capacity values apply to a cable with three loaded conductors under continuous operation at an ambient temperature of up to 40°C. In all other respects, the provisions of DIN VDE 0298 Part 4 apply.

For other ambient temperatures, the current-carrying capacity

°C	15	20	25	30	35	40	45	50	55	60	65	70	75	80
Factor	1.26	1.20	1.15	1.1	1.05	1	0.94	0.88	0.81	0.73	0.65	0.57	0.47	0.34

PERMISSIBLE TEMPERATURE

At conductor:	free-flexing	+5°C to + 70°C
	fixed	- 40°C to + 70°C
Bending radii:	fixed	4 dia
	free-flexing	7.5 dia